

A 356225

Certified, Filed and or Recorded on  
Apr. 02, 2008 AT 10:57AM

Signed: *CK*  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 3, Township 36, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 1-29-07 found a CAST IRON MON. WITH 1" IP BESIDE  
DATE

left monument as found  lowered monument  removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_  
DATE

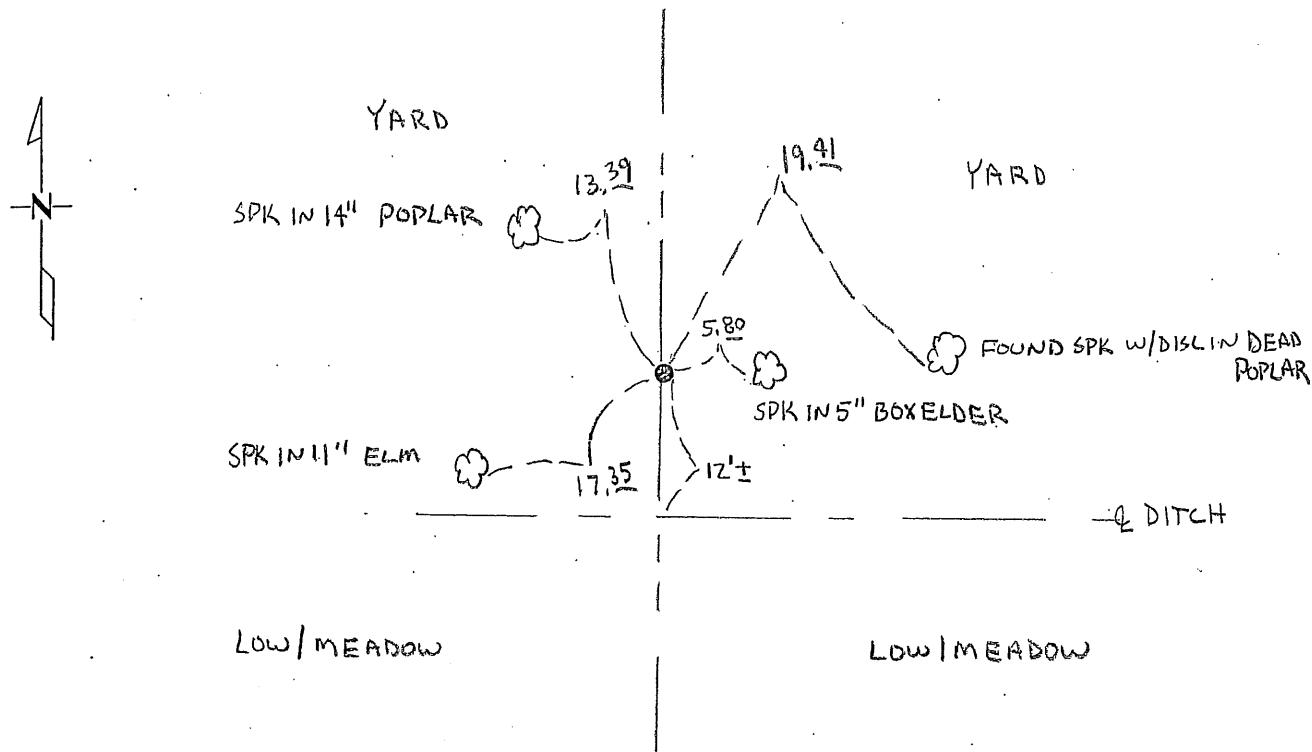

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: *Jerome C. Wittstock* Date 3-24-2008 License No. 19552  
Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer

Statement of Evidence:

L033

The East Quarter Corner of Section 3, Township 36 North, Range 30 West, Minden Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post was set at this location and bearing trees were recorded.

6" Aspen	N 5 3/4 W	125 links
6" Aspen	N 69 1/2 195 E	195 links

1989 David Regan, LS 12236, found a 1" iron pipe on a field division south and 12 feet north of an east-west ditch. He replaced the iron pipe with a cast iron monument and filed a Certificate of Location (Doc. No. 195015).

2002 No resurvey information was found on this corner in the Benton County records.

2007 Westwood Professional Services, Inc. found a CIM with a 1" open iron pipe along the side of cast and tied out as shown.

County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-129370.943  
E-499970.102


## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 36, Range 30, 4TH P.M.  
 STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 4/22/89 DATE found a 1" iron pipe on field division south, 12± north of E-W ditch
  - left monument as found,  lowered monument,  removed monument (explain)
- On 5/25/89 DATE placed a Cast Iron Monument

## SKETCH OF REFERENCE TIES

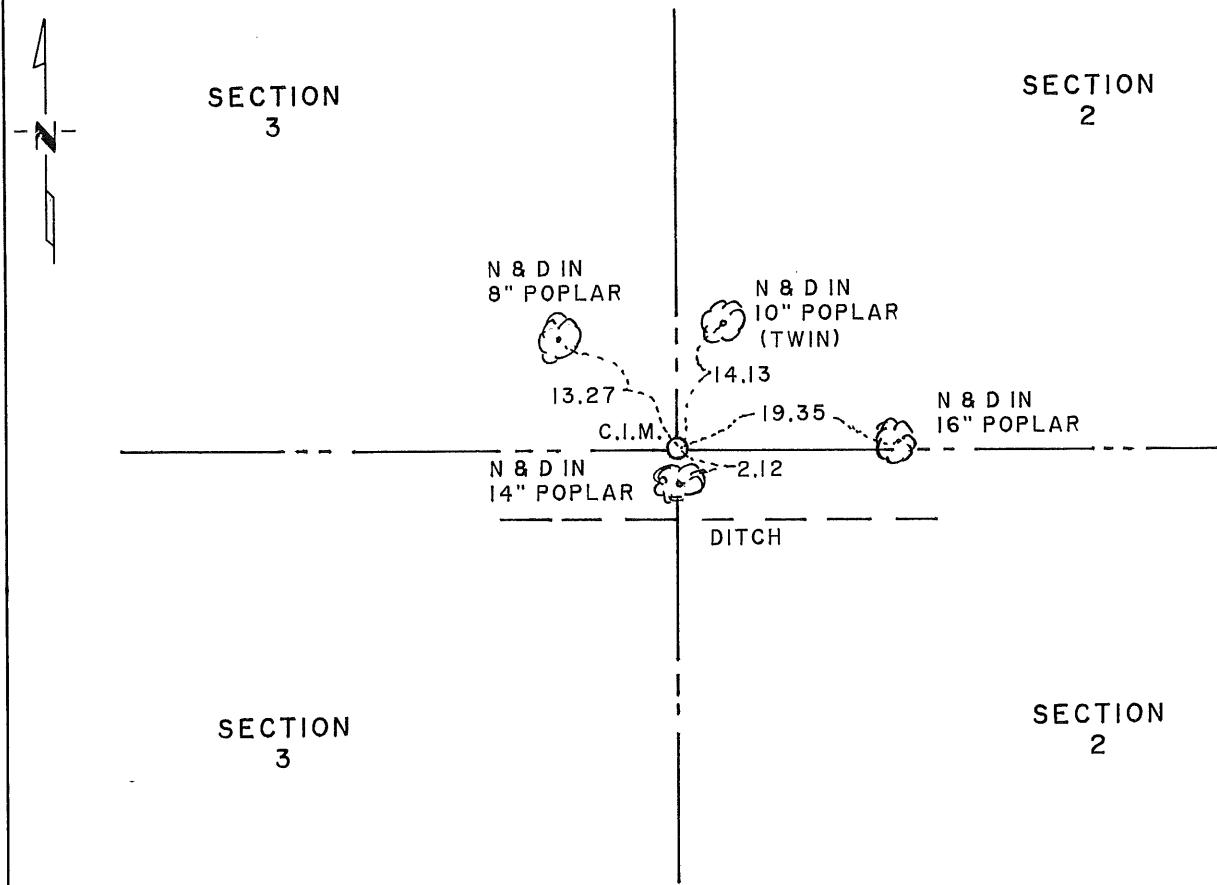

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Regan 10/30/89  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy  
 DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

The G.L.O. survey was done in October, 1849 by Theodore Conkey.

County records show no reference to this corner.

On 5/24/89, David P. Regan Land Surveying, Inc. searched the area and found a 1" iron pipe.

Accepted location as corner and set a Cast Iron Monument.

1 9 5 0 1 5

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND FOR RECORDING ON  
Nov 2 4 23 PM '89  
ALICE S. ENGELMEYER  
COUNTY RECORDER  
BY JH DEPUTY